

### File Types in Bioinformatics

2017-10-24

Martin Dahlö martin.dahlo@scilifelab.uu.se

Valentin Georgiev valentin.georgiev@icm.uu.se

Enabler for Life Science











### HOW STANDARDS PROLIFERATE: (SEE: A/C CHARGERS, CHARACTER ENCODINGS, INSTANT MESSAGING, ETC.)

SITUATION: THERE ARE 14 COMPETING STANDARDS.

14?! RIDICULOUS! WE NEED TO DEVELOP ONE UNIVERSAL STANDARD THAT COVERS EVERYONE'S USE CASES. YEAH!

SOON: SITUATION: THERE ARE 15 COMPETING STANDARDS.

http://xkcd.com



- Overwhelming at first
- Overview
  - FASTA reference sequences
  - FASTQ reads in raw form
  - SAM aligned reads
  - BAM compressed SAM file
  - CRAM even more compressed SAM file
  - GTF/GFF/BED annotations





- Used for: nucleotide or peptide sequences
- Simple structure
- > header sequence



### **FASTA**

- Used for: nucleotide or peptide sequences
- Simple structure

> H.Sapiens chr17:135135135-1313566

ACTCAGATCGGAATAGCATACGCATACTCAGATCGGAATAGCATACGCAT
GGATAGCTCACGACACATGACACTACAGCCAGACTACACGACTACACGAT
AAGGATATAGGACTACGACTAGCATCGACTAACTAGCTACATACG

>that random protein sequence i saw yesterday
ARGAEBAEUIRGHAERGIAEUAEILHGAEIGAHEGLAEJKRGNAERBIAE
AEGHAELGIHAEGOUIAENGAEBAERIOTYUGAEGHILAEHRGAEIRGYU
AEHAEHAEIOGAEGAERTBETHUETHIRTHJNRFS





- Just like FASTA, but with quality values
- Used for: raw data from sequencing (unaligned reads)

@ header sequence

+

quality





- Just like FASTA, but with quality values
- Used for: raw data from sequencing (unaligned reads)

```
@SEQ_001
GATTTGGGGTTCAAAGCAGTATCGATCAAATAGTAAATCCATTTGTTCAACTCACAGTTT
+
!''*((((***+))%%++)(%%!''*((((***).1***-+*''))**55CC!''*(D
@SEQ_002
GATTTGGGGTTCAAAGCAGTATTTGGGGTTCATTGGGGTTCATTGTTCAACTCACAGTTT
+
!''*((((***+))%>>CCCCC%++((((**).1***-+*''))**55CCF>>>>>C5
@SEQ_003
AAGCAGTATCGAGATTTGGGGTTCAAAGCAGTATAAGCAGTATCGATAAATCCATTTGTT
+
!''*((((*!''*(((**)(%%%).1***-+*'')))**55CCF>>>>>%%%).1B5
```



**FASTQ** 

- Quality 0-4040 = best
- ASCII encoded

Dec	Hex	Char	Dec	Hex	Char	Dec	Hex	Char	Dec	Hex	Char
0	00	Null	32	20	Space	64	40	0	96	60	
1	01	Start of heading	33	21	1%	65	41	A	97	61	a
2	02	Start of text	34	22	rr .	66	42	В	98	62	b
3	03	End of text	35	23	#	67	43	С	99	63	c
4	04	End of transmit	36	24	ş	68	44	D	100	64	d
5	05	Enquiry	37	25	*	69	45	E	101	65	e
6	06	Acknowledge	38	26	٤	70	46	F	102	66	f
7	07	Audible bell	39	27	1	71	47	G	103	67	g
8	08	Backspace	40	28	(	72	48	H	104	68	h
9	09	Horizontal tab	41	29	)	73	49	I	105	69	i
10	OA	Line feed	42	2A	*	74	4A	J	106	6A	j
11	OB	Vertical tab	43	2B	+	75	4B	K	107	6B	k
12	OC.	Form feed	44	2C	,	76	4C	L	108	6C	1
13	OD	Carriage return	45	2 D	<del>.</del>	77	4D	M	109	6D	m
14	OE	Shift out	46	2 E	•	78	4E	N	110	6E	n
15	OF	Shift in	47	2 F	1	79	4F	0	111	6F	0
16	10	Data link escape	48	30	0	80	50	P	112	70	р
17	11	Device control 1	49	31	1	81	51	Q	113	71	q
18	12	Device control 2	50	32	2	82	52	R	114	72	r
19	13	Device control 3	51	33	3	83	53	ສ	115	73	s
20	14	Device control 4	52	34	4	84	54	Т	116	74	t
21	15	Neg. acknowledge	53	35	5	85	55	U	117	75	u
22	16	Synchronous idle	54	36	6	86	56	V	118	76	v
23	17	End trans, block	55	37	7	87	57	ឃ	119	77	w
24	18	Cancel	56	38	8	88	58	X	120	78	x
25	19	End of medium	57	39	9	89	59	Y	121	79	У
26	1A	Substitution	58	3A	:	90	5A	Z	122	7A	z
27	1B	Escape	59	3 B	;	91	5B	[	123	7B	{
28	1C	File separator	60	3 C	<	92	5C	1	124	7C	1
29	1D	Group separator	61	3 D	=:	93	5D	]	125	7D	}
30	1E	Record separator	62	3 E	>	94	5E	٨	126	7E	~
31	1F	Unit separator	63	3 F	2	95	5F	ev ave	127	7F	



## **FASTQ**

(Illumina 1.8 + = 41)

- Quality 0-40
  - 40 = best
- ASCII encoded

```
!"#$%&'()*+,-./0123456789:;<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^ `abcdefghijklmnopqrstuvwxyz{|}~
33
                                          126
0.2......41
S - Sanger
        Phred+33, raw reads typically (0, 40)
X - Solexa
        Solexa+64, raw reads typically (-5, 40)
I - Illumina 1.3+ Phred+64, raw reads typically (0, 40)
J - Illumina 1.5+ Phred+64, raw reads typically (3, 40)
 with 0=unused, 1=unused, 2=Read Segment Quality Control Indicator (bold)
  (Note: See discussion above).
L - Illumina 1.8+ Phred+33, raw reads typically (0, 41)
```



# **FASTQ**

Quality 0-40

(Illumina 1.8 + = 41)

- 40 = best
- ASCII encoded

```
@SEQ_001

GATTTGGGGTTCAAAGCAGTATCGATCAAATAGTAAATCCATTTGTTCAACTCACAGTTT
+
!''*((((***+))%%++)(%%!''*((((***).1***-+*''))**55CC!''*(D
@SEQ_002

GATTTGGGGTTCAAAGCAGTATTTGGGGTTCATTGGGGTTCATTGTTCAACTCACAGTTT
+
!''*((((***+))%>>CCCCC%++((((**).1***-+*''))**55CCF>>>>>C5
@SEQ_003

AAGCAGTATCGAGATTTGGGGTTCAAAGCAGTATAAGCAGTATCGATAAATCCATTTGTT
+
!''*((((*!''*(((**)(%%%).1***-+*''))**55CCF>>>>>%%%).1B5
```



### SAM

- Used for: aligned reads
- Lots of columns...




SAM

Field	Regular expression	Range	Description	
QNAME	[^ \t\n\r]+	\r]+ Query pair NAME if paired; or Query NAME if unpaired <sup>2</sup>		
FLAG	[0-9]+	[0,216-1]	pitwise FLAG (Section 2.2.2)	
RNAME	[^ \t\n\r@=]+		Reference sequence NAME 3	
POS	[0-9]+	[0,2 <sup>29</sup> -1]	1-based leftmost POSition/coordinate of the clipped sequence	
MAPQ	[0-9]+	[0,28-1]	MAPping Quality (phred-scaled posterior probability that the mapping position of this read is incorrect) <sup>4</sup>	
CIGAR	([0-9]+[MIDNSHP])+ \*		extended CIGAR string	
MRNM	[^ \t\n\r@]+		Mate Reference sequence NaMe; "=" if the same as <rname> 3</rname>	
MPOS	[0-9]+	[0,2 <sup>29</sup> -1]	1-based leftmost Mate POSition of the clipped sequence	
ISIZE	-?[0-9]+	[-2 <sup>29</sup> ,2 <sup>29</sup> ]	inferred Insert SIZE 5	
SEQ	[acgtnACGTN.=]+ \*		query SEQuence; "=" for a match to the reference; n/N/. for ambiguity; cases are not maintained 6,7	
QUAL	[!-~]+ \*	[0,93]	query QUALity; ASCII-33 gives the Phred base quality 6,7	
TAG	[A-Z][A-Z0-9]		TAG	
VTYPE	[AifZH]		Value TYPE	
VALUE	[^\t\n\r]+		match <vtype> (space allowed)</vtype>	





- Used for: aligned reads
- Lots of columns..

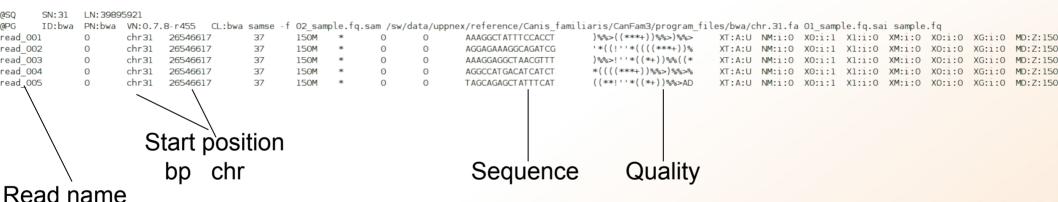





- Binary SAM (compressed)
- 25% of the size
- SAMtools to convert
- .bai = BAM index

#### Contents

1	Linux Introduction
1.1	Connecting to UPPMAX
1.2	Getting a node of your own
1.3	Moving and Looking Around
1.4	Copying files needed for laboratory 6
1.5	Unpack Files
1.6	Copying and Moving Files
1.7	Deleting Files
1.8	Open files
1.9	Wildcards
1.10	Utility Commands
2	Advanced Linux
2.1	Ownership & Permissions
	2.1.1 Owners
	2.1.2 Permissions
	2.1.3 Interpreting the permissions of files and directories 21
	2.1.4 Editing Ownership & Permissions 23
	2.1.5 Assignment
2.2	Symbolic links - Files
	2.2.1 Assignment
2.3	Symbolic links - Directories
	2.3.1 Assignment
2.4	Grep - Searching for text
	2.4.1 Assignment
2.5	Piping
2.6	Word Count
	2.6.1 Assignment
2.7	Extra material 1
2.8	Extra material 2
2.9	Extra material 3
3	UPPMAX Tutorial
3.1	Copying files needed for laboratory
3.2	Running a program
3.3	Modules
3.4	Submitting a job
3.5	Viewing the queue
3.6	Interactive
3.7	Extra, if you finish too fast





- Random order
- Have to sort before indexing






- Random order
- Have to sort before indexing

Chr1 Chr2 Chr3 Chr4 Chr5




## **BAM**

#### **Unsorted BAM**






### **BAM**

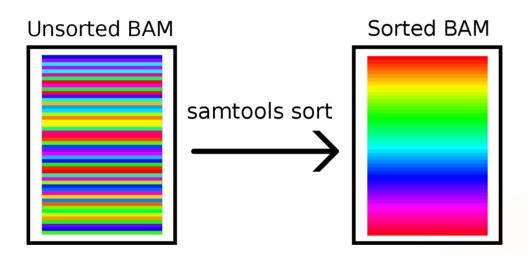





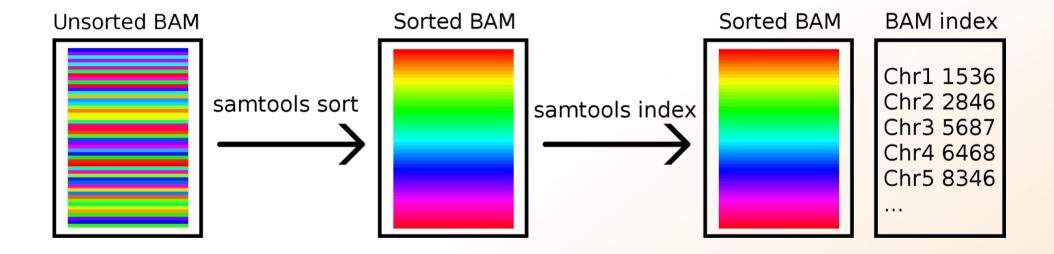



CRAM

- Very complex format
- Used together with a reference genome

AGGCTGAGTCACGACGTGTTGAGA Reads

TAGATCGAGGCTGAGTCACGACG


ATTCGGACGTAGATCGAGGCTGAG ACGTGTTGAGAGAGCCGTA

ATTCGGACGTAGATCGACGCTGAGTCACGACGTGTTGTGAGAGCCGTAGAC Ref:



### **CRAM**

- Quality scores?
- 3 modes:
  - Lossless
  - Binned
  - No quality

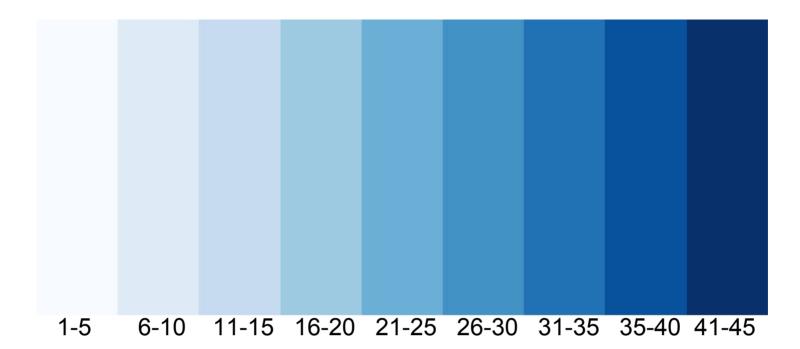


1 2 3 4 5 6 7 8 9 10 11 12 13 14 ... 32 33 34 35 36 37 38 39 40 41



### **CRAM**

- Quality scores?
- 3 modes:
  - Lossless
  - Binned
  - No quality

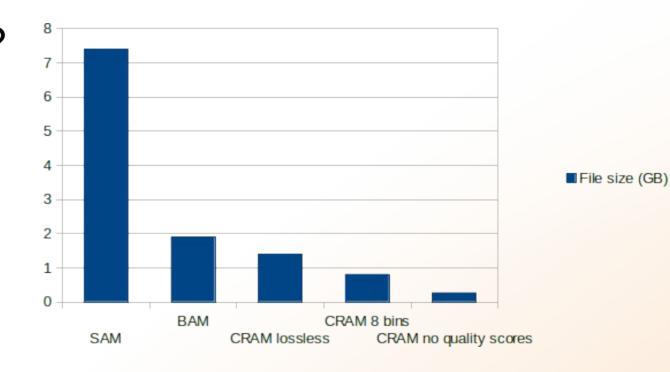

Not widespread, yet



### GTF/GFF/BED

- Used for: annotations
- Simple structure
- Usually:
- chr start stop extra info



### GTF/GFF/BED

- Used for: annotations
- Simple structure
- Usually:
- chr start stop extra info
- BED



### GTF/GFF/BED

- Used for: annotations
- Simple structure
- Usually:
- chr start stop extra info
- GFF

```
chr22 TeleGene enhancer 10000000 10001000 500 + . touchl
chr22 TeleGene promoter 10010000 10010100 900 + . touchl
chr22 TeleGene promoter 10020000 10025000 800 - . touch2
```



Laboratory time! (yet again)