



# Linux Introduction

2022-09-26

Martin Dahlö  
martin.dahlo@nbis.se

Enabler for Life Sciences

# Linux Introduction

Look up the links from Pre-course material, use Google, and ...

Practice makes perfect :)


Enabler for Life Sciences

- Uppsala Multidisciplinary Center for Advanced Computational Science
  - (Uppsala supercomputer center)
- Clusters
  - Rackham
  - Bianca
  - Snowy
- Uses Linux

- Uppsala Multidisciplinary Center for Advanced Computational Science
  - (Uppsala supercomputer center)
- Clusters
  - **Rackham**
  - Bianca
  - Snowy
- Uses Linux

- Why Linux?

- A powerful command-line interface
- Built for multi-user systems.
- An enormous amount of software is freely available

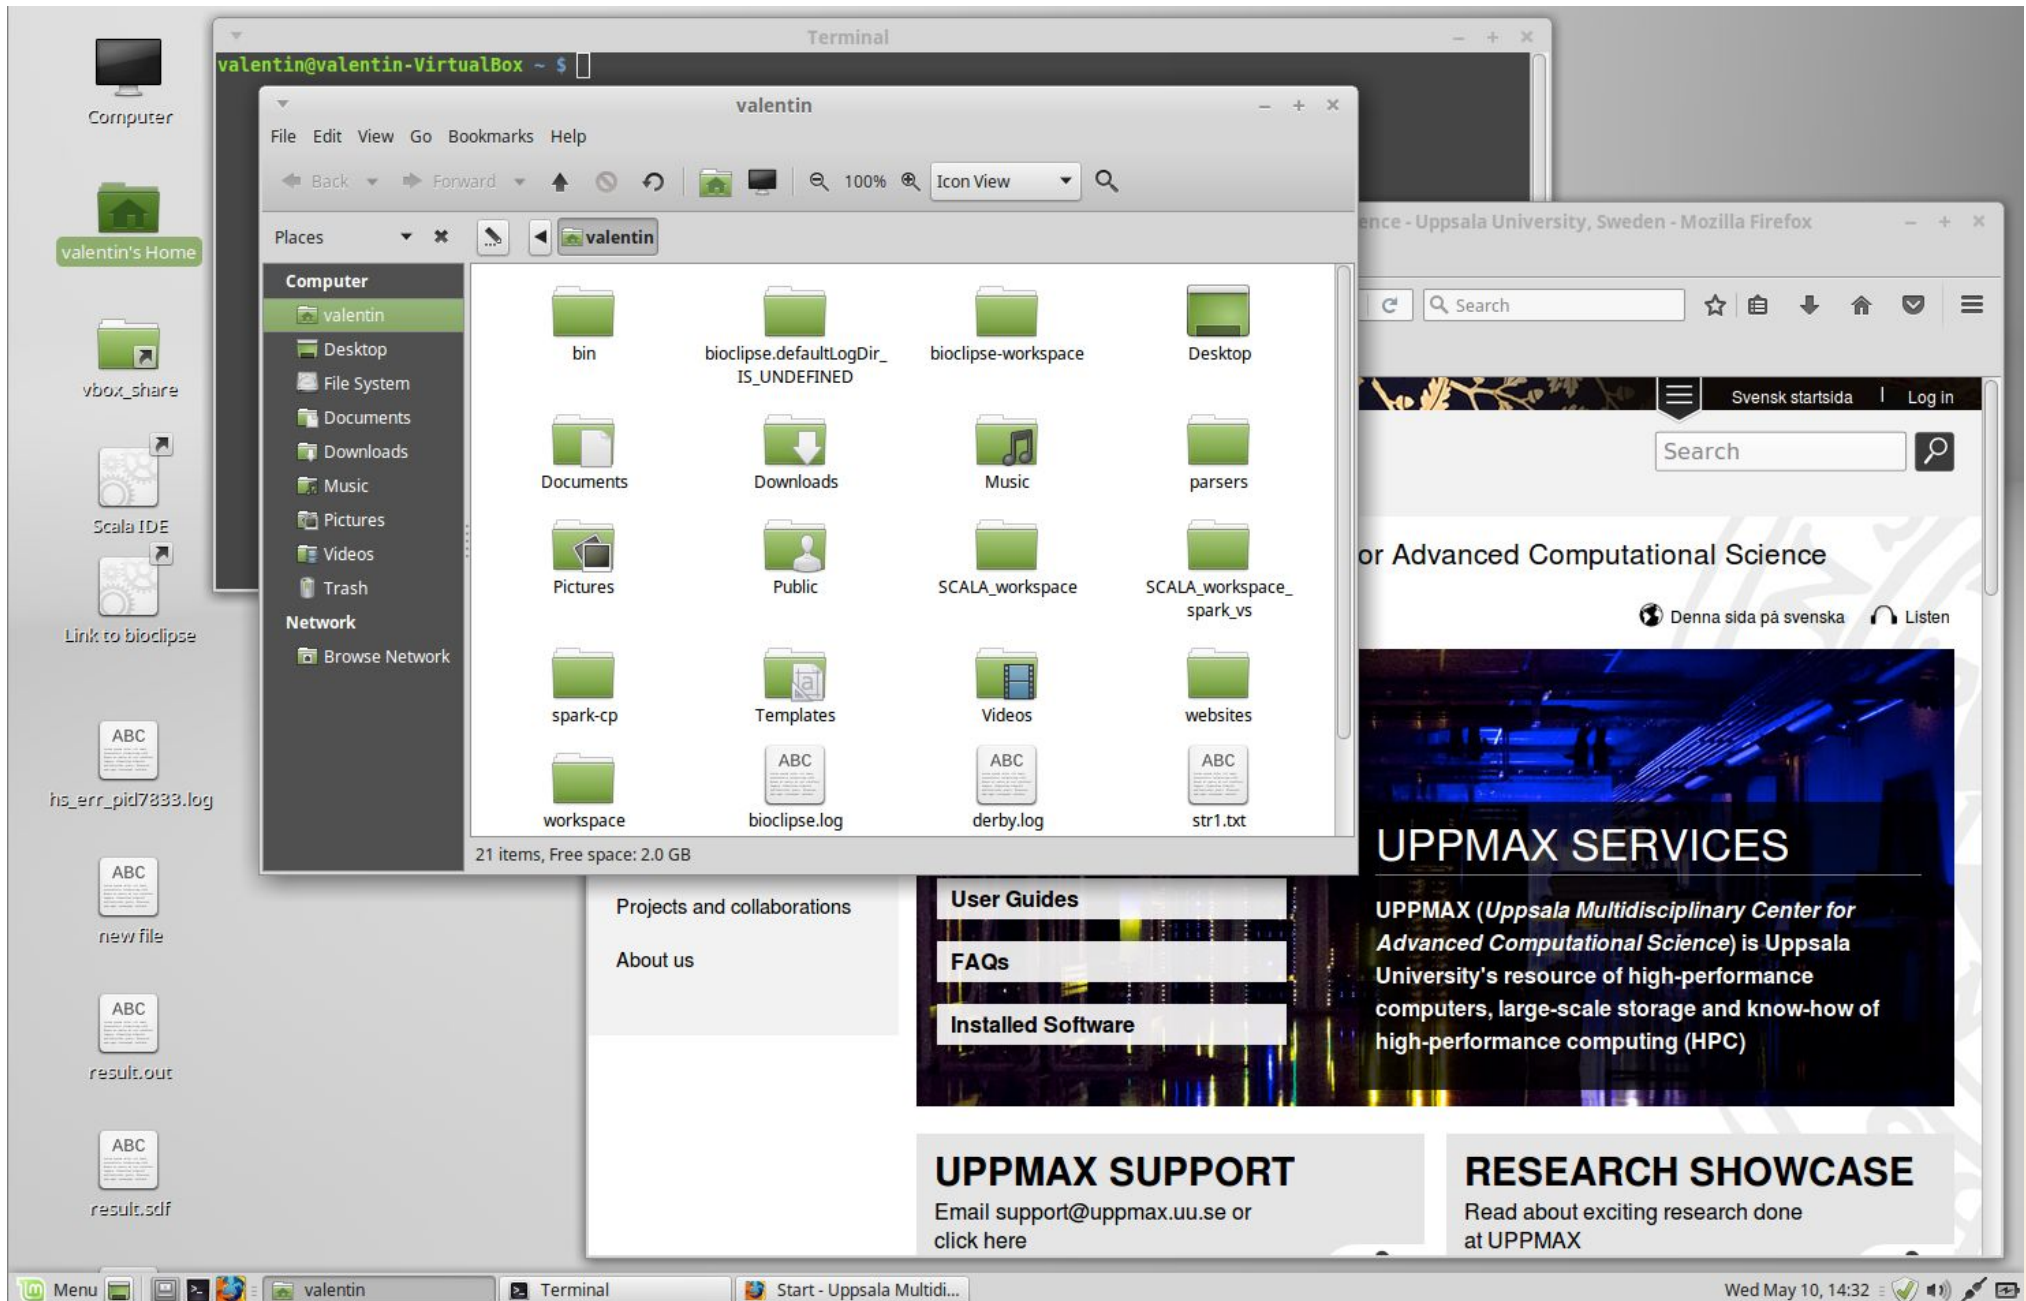

```

-rw-r--r-- 1 valentin valentin 51709 Oct 12 2015 str1.txt
-rw-r--r-- 1 valentin valentin 126832 Oct 12 2015 str2.txt
drwxr-xr-x 2 valentin valentin 4096 Sep 1 2015 Templates
-rw-r----- 1 valentin valentin 5 May 10 14:29 .vboxclient-clipboard.pid
-rw-r----- 1 valentin valentin 5 May 10 14:29 .vboxclient-display.pid
-rw-r----- 1 valentin valentin 5 May 10 14:29 .vboxclient-draganddrop.pid
-rw-r----- 1 valentin valentin 5 May 10 14:29 .vboxclient-seamless.pid
drwxr-xr-x 2 valentin valentin 4096 Sep 1 2015 Videos
-rw----- 1 valentin valentin 4798 Feb 15 2016 .viminfo
drwxr-xr-x 3 valentin valentin 4096 Jan 11 2016 websites
drwxr-xr-x 3 valentin valentin 4096 Jun 8 2016 workspace
-rw----- 1 valentin valentin 130 May 10 14:29 .Xauthority
-rw-r--r-- 1 valentin valentin 131 Sep 2 2015 .xinputrc
-rw-r--r-- 1 valentin valentin 3197 May 10 14:31 .xsession-errors
valentin@valentin-VirtualBox ~ $ ll
total 780
drwxr-xr-x 35 valentin valentin 4096 May 10 14:30 ./
drwxr-xr-x 3 root root 4096 Sep 1 2015 ../
drwx----- 3 valentin valentin 4096 Sep 2 2015 .adobe/
-rw----- 1 valentin valentin 6412 Dec 10 11:48 .bash_history
-rw-r--r-- 1 valentin valentin 220 Sep 1 2015 .bash_logout
-rw-r--r-- 1 valentin valentin 305 Feb 15 2016 .bashrc
drwxr-xr-x 8 valentin valentin 4096 Sep 2 2015 bin/
drwxr-xr-x 2 valentin valentin 4096 Nov 3 2016 bioclipse.defaultLogDir_IS_UNDEFINED/
-rw-r--r-- 1 valentin valentin 366894 Jun 15 2016 bioclipse.log
drwxr-xr-x 9 valentin valentin 4096 Nov 3 2016 bioclipse-workspace/
drwxr-xr-x 9 valentin valentin 4096 Sep 2 2015 .cache/
drwxr-xr-x 17 valentin valentin 4096 Sep 8 2015 .config/
drwx----- 3 valentin valentin 4096 Sep 1 2015 .dbus/
-rw-r--r-- 1 valentin valentin 709 Sep 2 2015 derby.log
drwxr-xr-x 2 valentin valentin 4096 Oct 12 2015 Desktop/
-rw----- 1 valentin valentin 2 May 10 14:29 .dmrc
drwxr-xr-x 2 valentin valentin 4096 Sep 1 2015 Documents/
drwxr-xr-x 3 valentin valentin 4096 Nov 3 2016 Downloads/
drwx----- 3 valentin valentin 4096 May 10 14:29 .gconf/
-rw-r--r-- 1 valentin valentin 74 Sep 2 2015 .gitconfig
-rw-r--r-- 1 valentin valentin 0 Sep 1 2015 .gksu.lock
drwx----- 3 valentin valentin 4096 Sep 1 2015 .gnome/
drwx----- 4 valentin valentin 4096 Jun 15 2016 .gnome2/
drwx----- 2 valentin valentin 4096 Sep 1 2015 .gnome2_private/
-rw-r--r-- 1 valentin valentin 37 Jan 11 2016 httrack.ini
-rw----- 1 valentin valentin 15540 May 10 14:29 .ICEauthority
drwxr-xr-x 4 valentin valentin 4096 Sep 7 2015 .java/
-rw----- 1 valentin valentin 35 Sep 2 2015 .lessht
drwxr-xr-x 4 valentin valentin 4096 Sep 1 2015 .linuxmint/
drwx----- 3 valentin valentin 4096 Sep 1 2015 .local/
drwxr-xr-x 3 valentin valentin 4096 Sep 1 2015 .m2/
drwx----- 3 valentin valentin 4096 Sep 2 2015 .macromedia/
drwxr-xr-x 4 valentin valentin 4096 Sep 1 2015 .mozilla/
drwxr-xr-x 2 valentin valentin 4096 Sep 1 2015 Music/
-rw-r--r-- 1 valentin valentin 213 Sep 2 2015 .pam_environment
drwxr-xr-x 4 valentin valentin 4096 Sep 2 2015 parsers/

```

The screenshot shows a Linux desktop environment. A file manager window is open, displaying a file tree with folders like 'Downloads', 'Music', and 'parsers'. The sidebar on the left contains navigation options: 'User Guides', 'FAQs', and 'Installed Software'. The main window displays a file tree with folders like 'Downloads', 'Music', and 'parsers'. A sidebar on the right contains 'UPPMAX SERVICES' and 'RESEARCH SHOWCASE' sections.

**UPPMAX SERVICES**  
UPPMAX (Uppsala Multidisciplinary Center for Advanced Computational Science) is Uppsala University's resource of high-performance computers, large-scale storage and know-how of high-performance computing (HPC)

**RESEARCH SHOWCASE**  
Read about exciting research done at UPPMAX



# Directory tree

Name	Size	Type	Date Modified
+ annotations		-- folder	2011-05-18 15:34:34
- annovar		-- folder	2011-05-18 15:34:31
+ annovarFiles		-- folder	2011-05-18 15:34:05
+ compare		-- folder	2011-05-18 15:34:29
+ prepStat		-- folder	2011-05-18 15:34:29
+ statFiles		-- folder	2011-05-18 15:34:06
- summarizePerGene		-- folder	2011-05-18 15:34:31
- data		-- folder	2011-05-18 15:34:31
01 1.0 1.annovar	1.4 MB	unknown	2011-05-18 15:34:30
1.annovar.alleleFreq.pdf	895 bytes	PDF document	2011-05-18 15:34:30
01 1.0 1.annovar.exonic_variant_function	242.9 KB	unknown	2011-05-18 15:34:30
01 1.0 1.annovar.hg19_snp131_dropped	837.2 KB	unknown	2011-05-18 15:34:30
01 1.0 1.annovar.hg19_snp131_filtered	905.6 KB	unknown	2011-05-18 15:34:30
ABC 1.annovar.log	725 bytes	application log	2011-05-18 15:34:30
01 1.0 1.annovar.stat	938 bytes	unknown	2011-05-18 15:34:30
01 1.0 1.annovar.variant_function	2.3 MB	unknown	2011-05-18 15:34:31
01 1.0 1.non_sym_gene_list	94.3 KB	unknown	2011-05-18 15:34:31
01 1.0 1.non_sym_gene_list_not_in_dbsnp	78.8 KB	unknown	2011-05-18 15:34:31
01 1.0 1.stop_gain_gene_list	4.4 KB	unknown	2011-05-18 15:34:31
01 1.0 1.stop_gain_gene_list_not_in_dbsnp	4.3 KB	unknown	2011-05-18 15:34:31
01 1.0 1.sym_gene_list	51.4 KB	unknown	2011-05-18 15:34:31
01 1.0 1.sym_gene_list_not_in_dbsnp	34.3 KB	unknown	2011-05-18 15:34:31
ABC test.out	2.7 MB	out document	2011-05-18 15:34:31
01 1.0 all.plot	500 bytes	unknown	2011-05-18 15:34:30
summary.ods	23.2 KB	OpenDocument Spreadsheet	2011-05-18 15:34:31


# Navigation Commands

- **ls** – list the content of a directory

# Navigation Commands







- **ls** – list the content of a directory

```
[dahlo@kalkyl4 dir]$
```

Name	Size	Type	Date Modified
 dir		-- folder	2012-01-05 13:44:47







- **ls** – list the content of a directory

```
[dahlo@kalkyl4 dir]$ ls
anotherFile.doc  directory1  file1.txt  file2.old  secondDirectory
```

Name	Size	Type	Date Modified
 dir		-- folder	2012-01-05 13:44:47
 directory1		-- folder	2012-01-05 13:45:43
 secondDirectory		-- folder	2012-01-05 13:46:21
 anotherFile.doc	27.6 KB	Word document	2012-01-05 13:44:47
 file1.txt	35.6 KB	plain text document	2012-01-05 13:44:15
 file2.old	2.2 KB	backup file	2012-01-05 13:44:33

- **ls** – list the content of a directory

```
[dahlo@kalkyl4 dir]$ ls -l
total 192
-rw-r--r-- 1 dahlo uppmx 28214 Jan  5 13:44 anotherFile.doc
drwxr-xr-x 2 dahlo uppmx  4096 Jan  5 13:45 directory1
-rw-r--r-- 1 dahlo uppmx 36458 Jan  5 13:44 file1.txt
-rw-r--r-- 1 dahlo uppmx  2273 Jan  5 13:44 file2.old
drwxr-xr-x 2 dahlo uppmx  4096 Jan  5 13:46 secondDirectory
```

Name	Size	Type	Date Modified
 dir		-- folder	2012-01-05 13:44:47
 directory1		-- folder	2012-01-05 13:45:43
 secondDirectory		-- folder	2012-01-05 13:46:21
 anotherFile.doc	27.6 KB	Word document	2012-01-05 13:44:47
 file1.txt	35.6 KB	plain text document	2012-01-05 13:44:15
 file2.old	2.2 KB	backup file	2012-01-05 13:44:33

# Navigation Commands

- **cd – change working directory**
  - `cd <directory name> = down`
  - `cd .. = up`

```
[dahlo@kalkyl4 dir]$ cd directory1
[dahlo@kalkyl4 directory1]$
```

Name	Size	Type	Date Modified
dir	--	folder	2012-01-05 13:44:47
directory1	--	folder	2012-01-05 13:45:43
secondDirectory	--	folder	2012-01-05 13:46:21
anotherFile.doc	27.6 KB	Word document	2012-01-05 13:44:47
file1.txt	35.6 KB	plain text document	2012-01-05 13:44:15
file2.old	2.2 KB	backup file	2012-01-05 13:44:33

# Navigation Commands

- **cd** – change working directory
  - `cd <directory name>` = down
  - `cd ..` = up

```
[dahlo@kalkyl4 dir]$ cd directory1
[dahlo@kalkyl4 directory1]$ ls -l
total 184
-rw-r--r-- 1 dahlo uppmax 56427 Jan  5 13:45 notes
-rw-r--r-- 1 dahlo uppmax 25301 Jan  5 13:45 test.txt
```

Name	Size	Type	Date Modified
dir	--	folder	2012-01-05 13:44:47
directory1	--	folder	2012-01-05 13:45:43
notes	55.1 KB	unknown	2012-01-05 13:45:43
test.txt	24.7 KB	plain text document	2012-01-05 13:45:26
secondDirectory	--	folder	2012-01-05 13:46:21
anotherFile.doc	27.6 KB	Word document	2012-01-05 13:44:47
file1.txt	35.6 KB	plain text document	2012-01-05 13:44:15
file2.old	2.2 KB	backup file	2012-01-05 13:44:33

# Navigation Commands

- **cd** – change working directory
  - `cd <directory name>` = down
  - `cd ..` = up

```
[dahlo@kalkyl4 directory1]$ cd ../secondDirectory
[dahlo@kalkyl4 secondDirectory]$ ls -l
total 252
-rw-r--r-- 1 dahlo uppmx 28214 Jan  5 13:46 bird.jpg
-rw-r--r-- 1 dahlo uppmx 112853 Jan  5 13:46 tree.jpg
```

Name	Size	Type	Date Modified
dir	--	folder	2012-01-05 13:44:47
directory1	--	folder	2012-01-05 13:45:43
secondDirectory	--	folder	2012-01-05 13:46:21
bird.jpg	27.6 KB	JPEG Image	2012-01-05 13:46:21
tree.jpg	110.2 KB	JPEG Image	2012-01-05 13:46:09
anotherFile.doc	27.6 KB	Word document	2012-01-05 13:44:47
file1.txt	35.6 KB	plain text document	2012-01-05 13:44:15
file2.old	2.2 KB	backup file	2012-01-05 13:44:33



# Navigation Commands

- **cd** – change working directory
  - `cd <directory name>` = down
  - `cd ..` = up

```
[dahlo@kalkyl4 secondDirectory]$ ls -l ../directory1/
total 184
-rw-r--r-- 1 dahlo uppmx 56427 Jan  5 13:45 notes
-rw-r--r-- 1 dahlo uppmx 25301 Jan  5 13:45 test.txt
```

Name	Size	Type	Date Modified
dir	--	folder	2012-01-05 13:44:47
directory1	--	folder	2012-01-05 13:45:43
notes	55.1 KB	unknown	2012-01-05 13:45:43
test.txt	24.7 KB	plain text document	2012-01-05 13:45:26
secondDirectory	--	folder	2012-01-05 13:46:21
anotherFile.doc	27.6 KB	Word document	2012-01-05 13:44:47
file1.txt	35.6 KB	plain text document	2012-01-05 13:44:15
file2.old	2.2 KB	backup file	2012-01-05 13:44:33

- **pwd** – print working directory

```
[dahlo@kalkyl4 dir]$ pwd  
/home/dahlo/glob/work/testarea/temp/dir
```

- **pwd** – print working directory

```
[dahlo@kalkyl4 dir]$ pwd  
/home/dahlo/glob/work/testarea/temp/dir
```

```
[dahlo@kalkyl4 dir]$ cd directory1/
```

```
[dahlo@kalkyl4 directory1]$ pwd  
/home/dahlo/glob/work/testarea/temp/dir/directory1
```

- Absolute paths
  - Starts with a /
  - Defined from the root of the file system

`/home/dahlo/documents/results.csv`

`/proj/g2019031/nobackup/`

- Absolute paths
  - Starts with a /
  - Defined from the root of the file system

`/home/dahlo/documents/results.csv`

`/proj/g2019031/nobackup/`

- Like an address  
`Husargatan 3, Uppsala, Sweden`

- Relative paths
  - Does not start with a /
  - Relative to where you are when using it

`../documents/results.csv`

`nobackup/dahlo/linux_intro/files.zip`

- Relative paths
  - Does not start with a /
  - Relative to where you are when using it

`../documents/results.csv`

`nobackup/dahlo/linux_intro/files.zip`

- Like a direction
  - `4 blocks to the right, 2nd house`

# Navigation Commands

- Summary
  - **ls** – list content of directory
  - **cd** – change working directory
  - **pwd** – print working directory
  - Use them to explore absolute/relative paths

Name	Size	Type	Date Modified
dir		-- folder	2012-01-05 13:44:47
directory1		-- folder	2012-01-05 13:45:43
secondDirectory		-- folder	2012-01-05 13:46:21
bird.jpg	27.6 KB	JPEG Image	2012-01-05 13:46:21
tree.jpg	110.2 KB	JPEG Image	2012-01-05 13:46:09
anotherFile.doc	27.6 KB	Word document	2012-01-05 13:44:47
file1.txt	35.6 KB	plain text document	2012-01-05 13:44:15
file2.old	2.2 KB	backup file	2012-01-05 13:44:33





## **cp - copy a file**

```
cp <name of original> <name of copy>
```

## cp - copy a file

```
cp <name of original> <name of copy>
```



```
cp myText.txt copy_of_my_text.txt
```

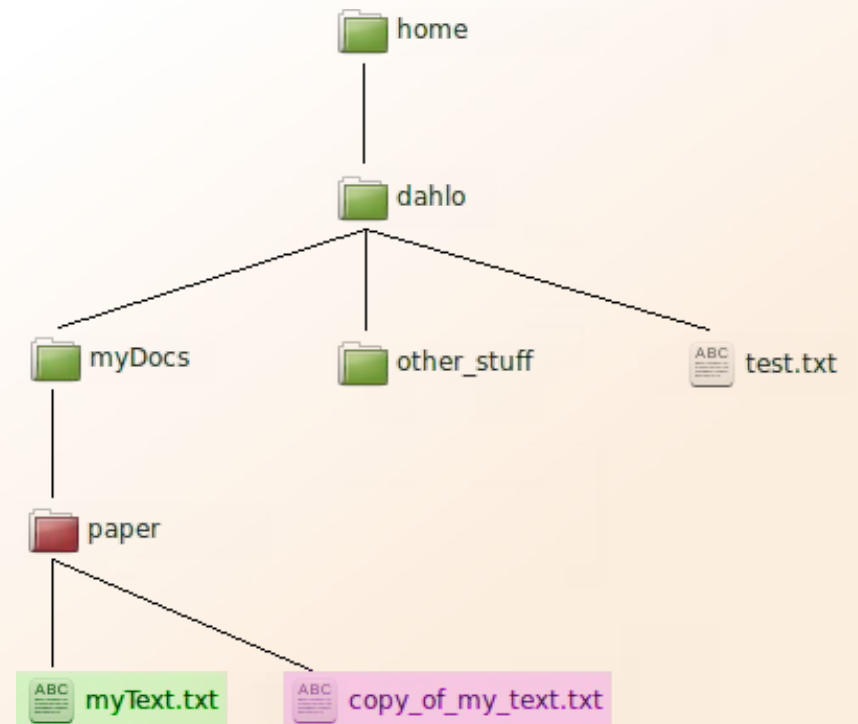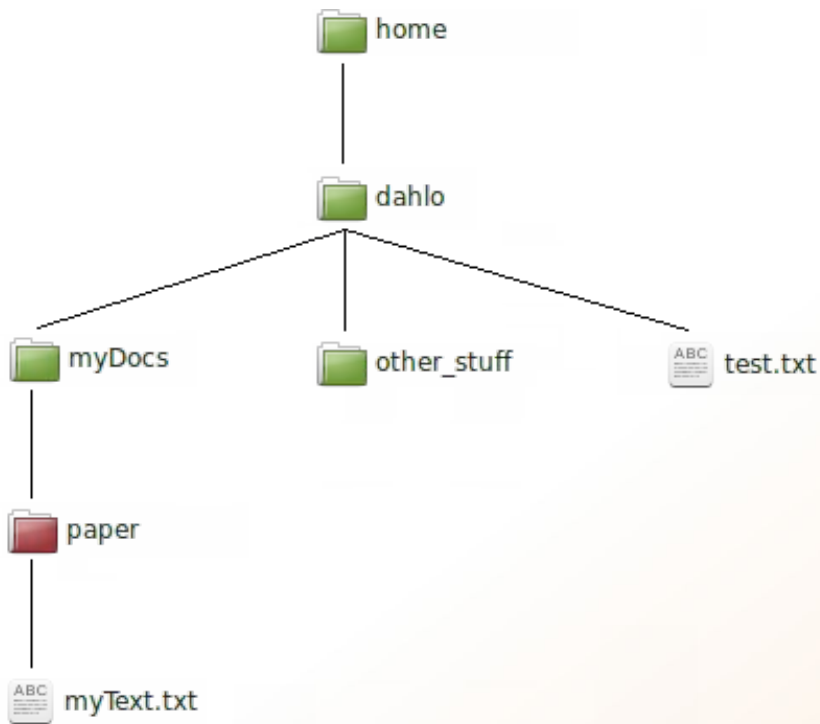

## cp - copy a file

```
cp <name of original> <name of copy>
```



```
cp /home/dahlo/test.txt ../
```

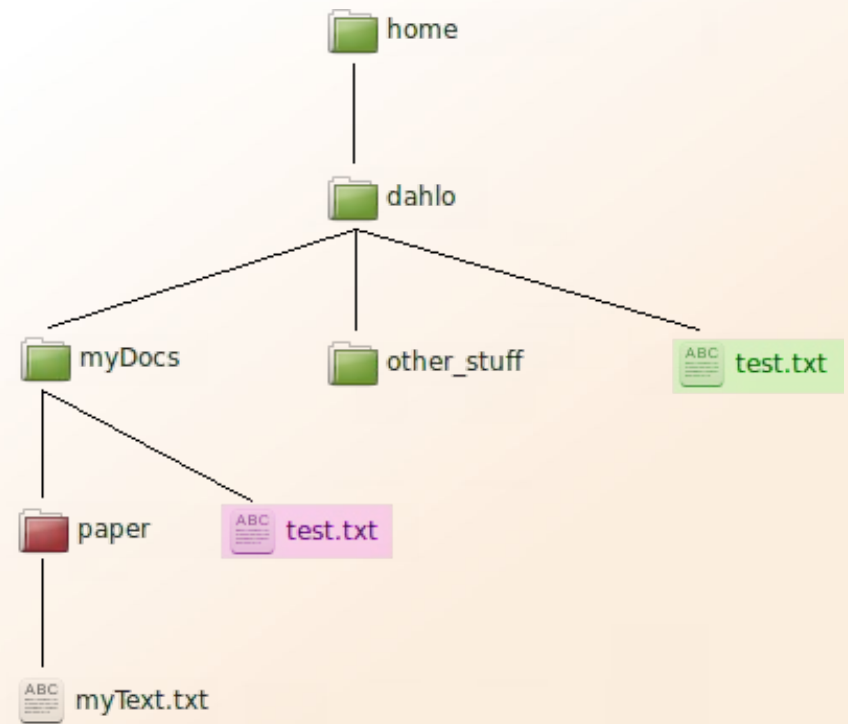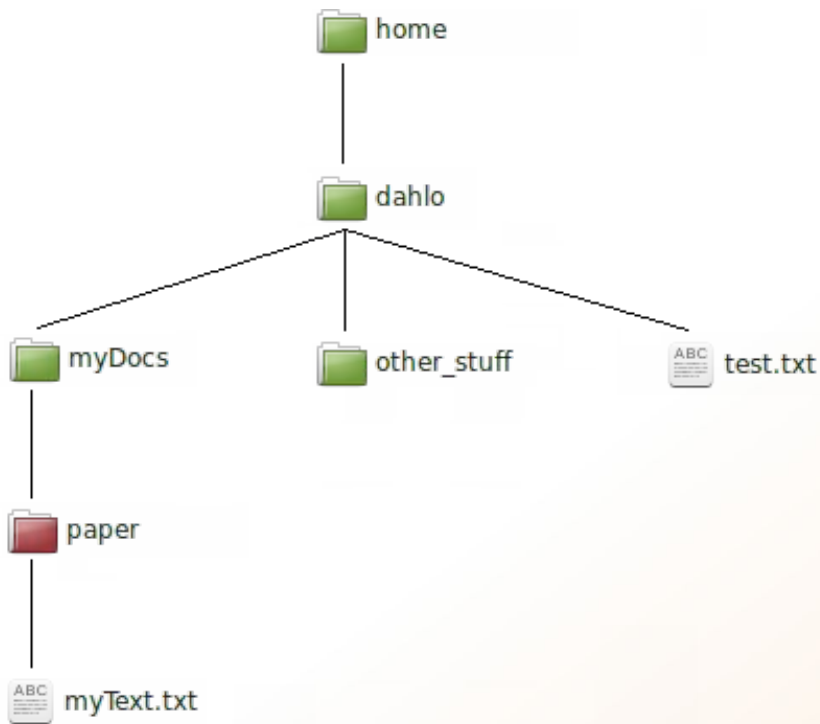

## mv - move a file

`mv <name of the file> <name of the "copy">`

```
mv /home/dahlo/test.txt ../../myDocs/
```

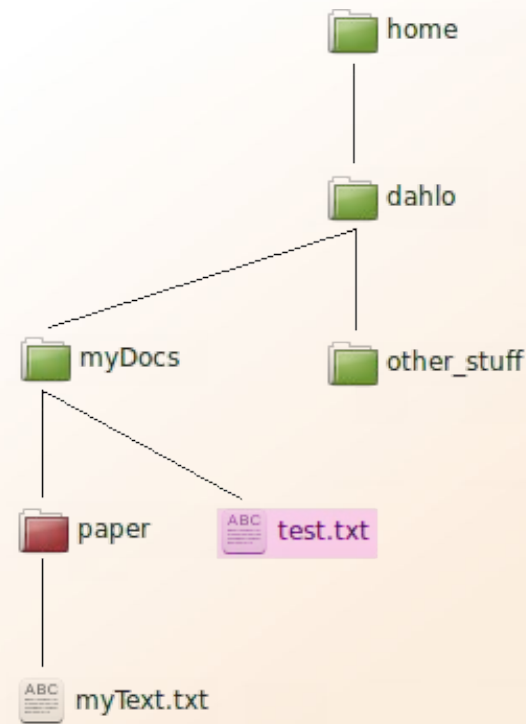
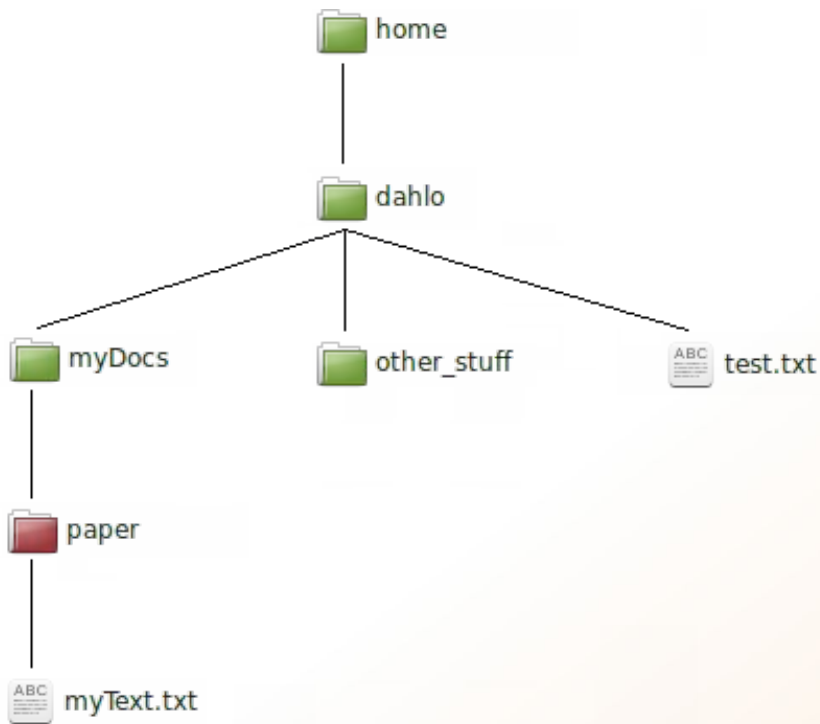


# Interaction Commands

## **mv** - rename a file

```
mv <original name> <new name>
```


```
mv myText.txt copy_of_my_text.txt
```

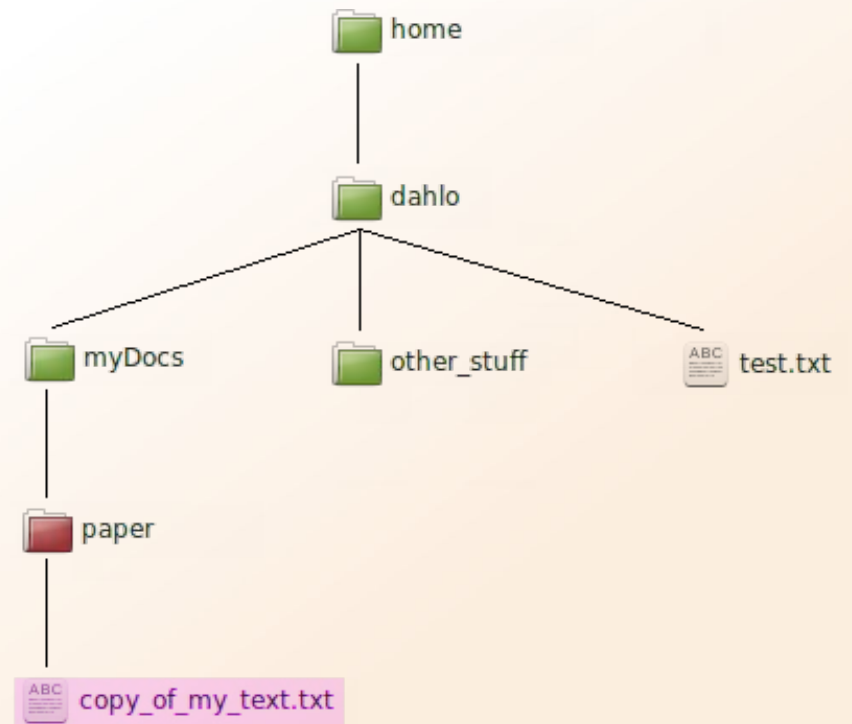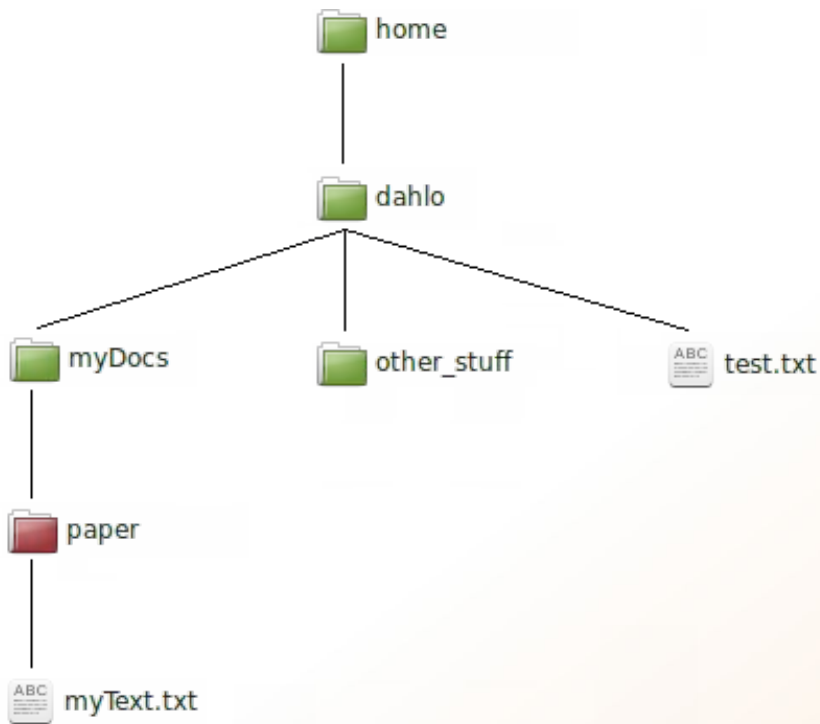

**less** - view content of a file

```
less <file name>
```

```
less readme.txt
```

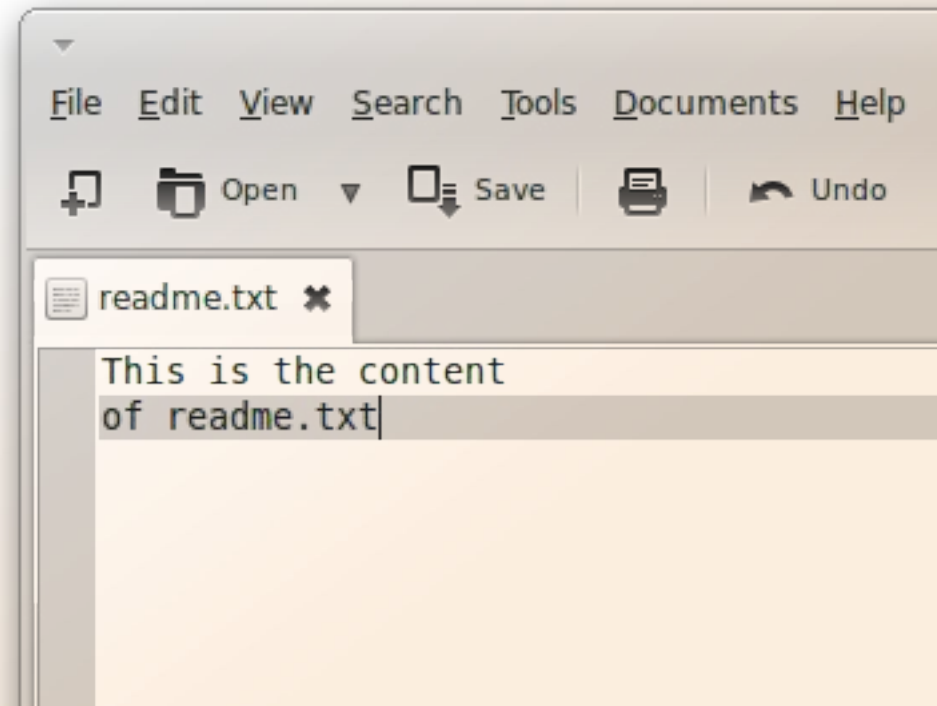


## **less** - view content of a file

```
less <file name>
```

```
less readme.txt
```

```
This is the content  
of readme.txt  
(END)
```

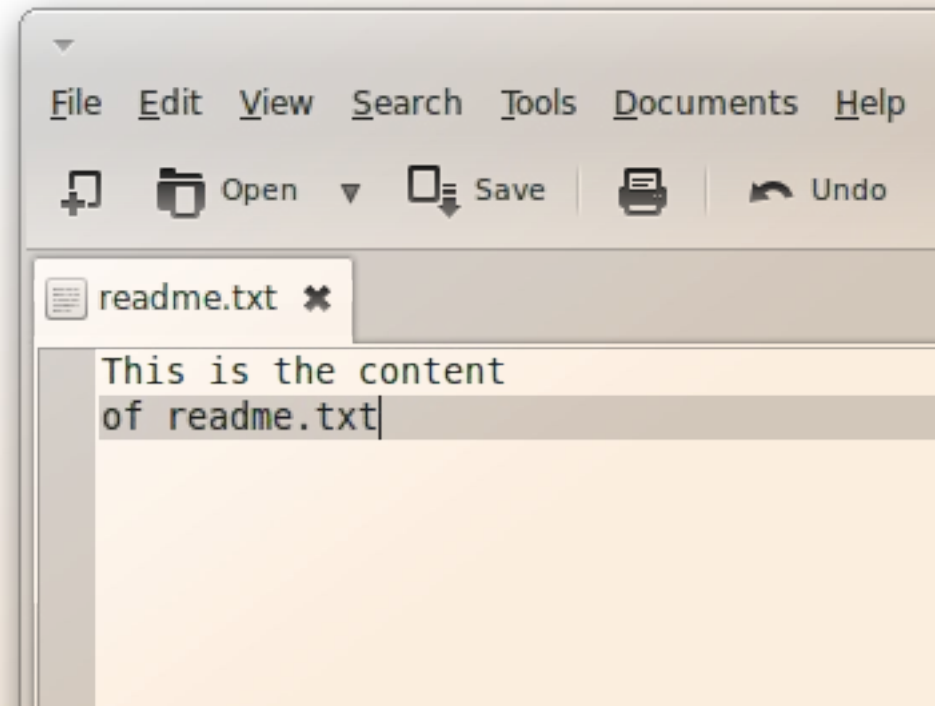


**less** - view content of a file

```
less <file name>
```

```
less readme.txt
```

```
This is the content  
of readme.txt  
(END)
```

press **Q** to exit less

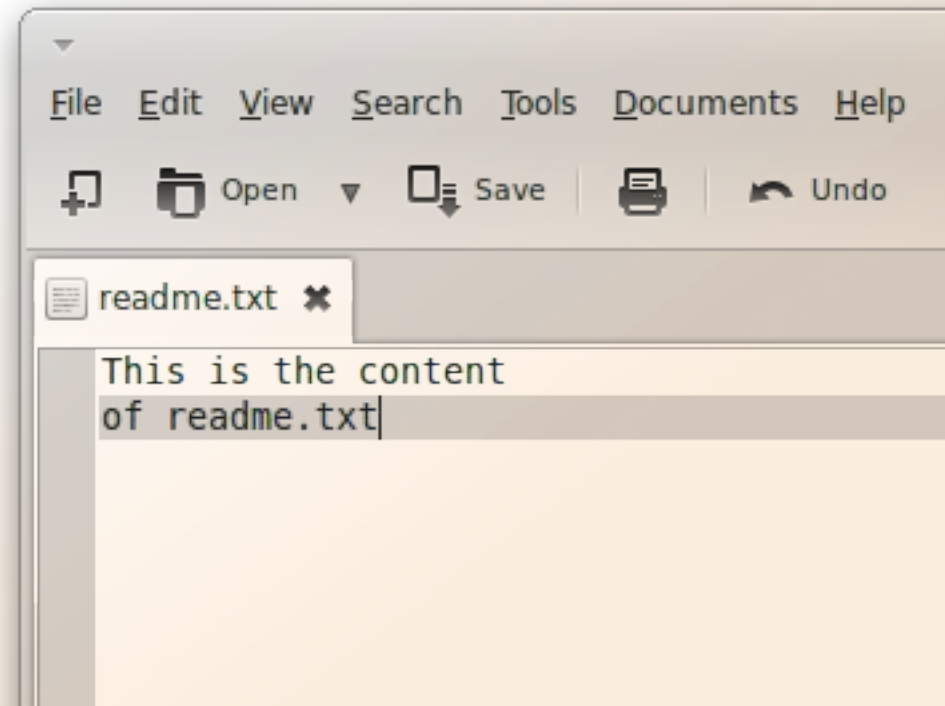



**head** - view the first rows of a file

```
head <filename>
```

```
[dahlo@dahlo dahlo]$
```

**head** - view the first rows of a file

```
head <filename>
```

```
[dahlo@dahlo dahlo]$ ls -l
total 57
drwxrwxrwx 1 root root 4096 2012-09-14 10:16 .
drwxrwxrwx 1 root root  0 2012-01-17 08:28 ..
drwxrwxrwx 1 root root  0 2012-01-28 21:41 glob
drwxrwxrwx 1 root root  0 2012-08-22 17:06 myDocs
drwxrwxrwx 1 root root  0 2012-01-29 01:10 other stuff
-rwxrwxrwx 1 root root  36 2012-09-13 15:16 readme.txt
-rwxrwxrwx 1 root root 53027 2012-09-12 10:31 test.txt
[dahlo@dahlo dahlo]$
```

**head** - view the first rows of a file

```
head <filename>
```

```
[dahlo@dahlo dahlo]$ ls -l
total 57
drwxrwxrwx 1 root root 4096 2012-09-14 10:16 .
drwxrwxrwx 1 root root 0 2012-01-17 08:28 ..
drwxrwxrwx 1 root root 0 2012-01-28 21:41 glob
drwxrwxrwx 1 root root 0 2012-08-22 17:06 myDocs
drwxrwxrwx 1 root root 0 2012-01-29 01:10 other stuff
-rwxrwxrwx 1 root root 36 2012-09-13 15:16 readme.txt
-rwxrwxrwx 1 root root 53027 2012-09-12 10:31 test.txt
[dahlo@dahlo dahlo]$
[dahlo@dahlo dahlo]$ head test.txt
```

## head - view the first rows of a file

```
head <filename>
```

```
[dahlo@dahlo dahlo]$ ls -l
total 57
drwxrwxrwx 1 root root 4096 2012-09-14 10:16 .
drwxrwxrwx 1 root root 0 2012-01-17 08:28 ..
drwxrwxrwx 1 root root 0 2012-01-28 21:41 glob
drwxrwxrwx 1 root root 0 2012-08-22 17:06 myDocs
drwxrwxrwx 1 root root 0 2012-01-29 01:10 other stuff
-rwxrwxrwx 1 root root 36 2012-09-13 15:16 readme.txt
-rwxrwxrwx 1 root root 53027 2012-09-12 10:31 test.txt
[dahlo@dahlo dahlo]$
[dahlo@dahlo dahlo]$ head test.txt
This file contains any messages produced by compilers while
running configure, to aid debugging if configure makes a mistake.

It was created by PSNC DRMAA for SLURM configure 1.0.5, which was
generated by GNU Autoconf 2.67. Invocation command line was

 $ ./configure --with-slurm-inc=/usr/include/slurm --with-slurm-lib=/usr/lib64/slurm --prefix=/bubo/sw/apps/build/slurm
-drmma/1.0.5

## ----- ##
## Platform. ##
[dahlo@dahlo dahlo]$
```

## head - view the first rows of a file

```
head -n <nr of lines> <filename>
```

```
[dahlo@dahlo dahlo]$ ls -l
total 57
drwxrwxrwx 1 root root 4096 2012-09-14 10:16 .
drwxrwxrwx 1 root root 0 2012-01-17 08:28 ..
drwxrwxrwx 1 root root 0 2012-01-28 21:41 glob
drwxrwxrwx 1 root root 0 2012-08-22 17:06 myDocs
drwxrwxrwx 1 root root 0 2012-01-29 01:10 other stuff
-rwxrwxrwx 1 root root 36 2012-09-13 15:16 readme.txt
-rwxrwxrwx 1 root root 53027 2012-09-12 10:31 test.txt
[dahlo@dahlo dahlo]$
[dahlo@dahlo dahlo]$ head -n 3 test.txt
This file contains any messages produced by compilers while
running configure, to aid debugging if configure makes a mistake.
[dahlo@dahlo dahlo]$
```

**tail** - view the last rows of a file

```
tail <filename>
```

```
[dahlo@dahlo dahlo]$ ls -l
total 57
drwxrwxrwx 1 root root 4096 2012-09-14 10:16 .
drwxrwxrwx 1 root root 0 2012-01-17 08:28 ..
drwxrwxrwx 1 root root 0 2012-01-28 21:41 glob
drwxrwxrwx 1 root root 0 2012-08-22 17:06 myDocs
drwxrwxrwx 1 root root 0 2012-01-29 01:10 other stuff
-rwxrwxrwx 1 root root 36 2012-09-13 15:16 readme.txt
-rwxrwxrwx 1 root root 53027 2012-09-12 10:31 test.txt
[dahlo@dahlo dahlo]$
[dahlo@dahlo dahlo]$ tail test.txt
#define HAVE_STRCASECMP 1
#define HAVE_STRCHR 1
#define HAVE_STRDUP 1
#define HAVE_STRERROR 1
#define HAVE_STRNDUP 1
#define HAVE_STRSTR 1
#define HAVE_STRTOL 1
#define HAVE_VASPRINTF 1

configure: exit 0
[dahlo@dahlo dahlo]$
```

**tail** - view the last n rows of a file

```
tail -n <nr of lines> <filename>
```

```
[dahlo@dahlo dahlo]$ ls -l
total 57
drwxrwxrwx 1 root root 4096 2012-09-14 10:16 .
drwxrwxrwx 1 root root 0 2012-01-17 08:28 ..
drwxrwxrwx 1 root root 0 2012-01-28 21:41 glob
drwxrwxrwx 1 root root 0 2012-08-22 17:06 myDocs
drwxrwxrwx 1 root root 0 2012-01-29 01:10 other stuff
-rwxrwxrwx 1 root root 36 2012-09-13 15:16 readme.txt
-rwxrwxrwx 1 root root 53027 2012-09-12 10:31 test.txt
[dahlo@dahlo dahlo]$
[dahlo@dahlo dahlo]$ tail -n 3 test.txt
#define HAVE_VASPRINTF 1

configure: exit 0
[dahlo@dahlo dahlo]$
```

**nano** - edit content of a file

```
nano <file name>
```

```
nano readme.txt
```



## nano - edit content of a file

```
nano <file name>
```

```
nano readme.txt
```

**^ = ctrl**

```
GNU nano 2.2.6
```

```
File: readme.txt
```

```
This is the content  
of readme.txt
```

```
[ Read 3 lines ]
```

```
^G Get Help
```

```
^O WriteOut
```

```
^R Read File
```

```
^Y Prev Page
```

```
^K Cut Text
```

```
^C Cur Pos
```

```
^X Exit
```

```
^J Justify
```

```
^W Where Is
```

```
^V Next Page
```

```
^U UnCut Text
```

```
^T To Spell
```

**rm** - remove a file

There is no trash bin in CLI! Gone is gone..

```
rm <file name>
```

**Ex.**

```
rm readme.txt
```

```
rm ../../../../file1.txt
```

```
rm /home/dahlo/test.txt
```

\*

```
[dahlo@dahlo dir]$ ls -l
total 68
-rwxrwxrwx 1 root root 28214 2012-01-05 13:44 anotherFile.doc
drwxrwxrwx 1 root root    0 2012-01-17 08:28 directory1
-rwxrwxrwx 1 root root 36458 2012-01-05 13:44 file1.txt
-rwxrwxrwx 1 root root  2273 2012-01-05 13:44 file2.old
drwxrwxrwx 1 root root    0 2012-01-17 08:28 secondDirectory
[dahlo@dahlo dir]$
```

\*

```
[dahlo@dahlo dir]$ ls -l
total 68
-rwxrwxrwx 1 root root 28214 2012-01-05 13:44 anotherFile.doc
drwxrwxrwx 1 root root 0 2012-01-17 08:28 directory1
-rwxrwxrwx 1 root root 36458 2012-01-05 13:44 file1.txt
-rwxrwxrwx 1 root root 2273 2012-01-05 13:44 file2.old
drwxrwxrwx 1 root root 0 2012-01-17 08:28 secondDirectory
[dahlo@dahlo dir]$
[dahlo@dahlo dir]$ ls -l *.txt
-rwxrwxrwx 1 root root 36458 2012-01-05 13:44 file1.txt
[dahlo@dahlo dir]$
```

\*

```
[dahlo@dahlo dir]$ ls -l
total 68
-rwxrwxrwx 1 root root 28214 2012-01-05 13:44 anotherFile.doc
drwxrwxrwx 1 root root    0 2012-01-17 08:28 directory1
-rwxrwxrwx 1 root root 36458 2012-01-05 13:44 file1.txt
-rwxrwxrwx 1 root root  2273 2012-01-05 13:44 file2.old
drwxrwxrwx 1 root root    0 2012-01-17 08:28 secondDirectory
[dahlo@dahlo dir]$
[dahlo@dahlo dir]$ ls -l *.txt
-rwxrwxrwx 1 root root 36458 2012-01-05 13:44 file1.txt
[dahlo@dahlo dir]$
[dahlo@dahlo dir]$ ls -l file*
-rwxrwxrwx 1 root root 36458 2012-01-05 13:44 file1.txt
-rwxrwxrwx 1 root root  2273 2012-01-05 13:44 file2.old
[dahlo@dahlo dir]$ █
```

\*

Works with most Linux commands

Ex:

```
cp *.txt directory1/
```

\*

Works with most Linux commands

Ex:

```
cp *.txt directory1/  
rm *.tmp
```

# TAB COMPLETION

**(try to) never** type a path or filename without it!



## TAB COMPLETION

**(try to) never** type a path or filename without it!

```
[dahlo@dahlo-linux dir]$ ls -l
total 68
-rwxrwxrwx 1 root root 28214 2012-01-05 13:44 anotherFile.doc
drwxrwxrwx 1 root root    0 2012-01-17 08:28 directory1
-rwxrwxrwx 1 root root 36458 2012-01-05 13:44 file1.txt
-rwxrwxrwx 1 root root  2273 2012-01-05 13:44 file2.old
drwxrwxrwx 1 root root    0 2012-01-17 08:28 secondDirectory
[dahlo@dahlo-linux dir]$ nano fi
```

## TAB COMPLETION

**(try to) never** type a path or filename without it!

```
[dahlo@dahlo-linux dir]$ ls -l
total 68
-rwxrwxrwx 1 root root 28214 2012-01-05 13:44 anotherFile.doc
drwxrwxrwx 1 root root    0 2012-01-17 08:28 directory1
-rwxrwxrwx 1 root root 36458 2012-01-05 13:44 file1.txt
-rwxrwxrwx 1 root root  2273 2012-01-05 13:44 file2.old
drwxrwxrwx 1 root root    0 2012-01-17 08:28 secondDirectory
[dahlo@dahlo-linux dir]$ nano file█
```

## TAB COMPLETION

**(try to) never** type a path or filename without it!

```
[dahlo@dahlo-linux dir]$ ls -l
total 68
-rwxrwxrwx 1 root root 28214 2012-01-05 13:44 anotherFile.doc
drwxrwxrwx 1 root root    0 2012-01-17 08:28 directory1
-rwxrwxrwx 1 root root 36458 2012-01-05 13:44 file1.txt
-rwxrwxrwx 1 root root  2273 2012-01-05 13:44 file2.old
drwxrwxrwx 1 root root    0 2012-01-17 08:28 secondDirectory
[dahlo@dahlo-linux dir]$ nano file
file1.txt file2.old
[dahlo@dahlo-linux dir]$ nano file█
```

## TAB COMPLETION

**(try to) never** type a path or filename without it!

```
[dahlo@dahlo-linux dir]$ ls -l
total 68
-rwxrwxrwx 1 root root 28214 2012-01-05 13:44 anotherFile.doc
drwxrwxrwx 1 root root    0 2012-01-17 08:28 directory1
-rwxrwxrwx 1 root root 36458 2012-01-05 13:44 file1.txt
-rwxrwxrwx 1 root root  2273 2012-01-05 13:44 file2.old
drwxrwxrwx 1 root root    0 2012-01-17 08:28 secondDirectory
[dahlo@dahlo-linux dir]$ nano file
file1.txt file2.old
[dahlo@dahlo-linux dir]$ nano file1.txt █
```

# Good to Know Commands

**top** - how much is the computer working?

top

```
top - 21:27:48 up 37 days, 7:34, 2 users, load average: 6.38, 6.09, 6.03
Tasks: 278 total, 4 running, 274 sleeping, 0 stopped, 0 zombie
Cpu(s): 73.5%us, 1.5%sy, 0.0%ni, 24.3%id, 0.6%wa, 0.0%hi, 0.0%si, 0.0%st
Mem: 24598372k total, 17703556k used, 6894816k free, 83596k buffers
Swap: 25165816k total, 29704k used, 25136112k free, 15403636k cached
```

PID	USER	PR	NI	VIRT	RES	SHR	S	%CPU	%MEM	TIME+	COMMAND
5751	zhibing	20	0	1531m	45m	9492	S	100.0	0.2	679:58.20	invaperco
5755	zhibing	20	0	1531m	43m	9492	S	100.0	0.2	679:49.38	invaperco
5759	zhibing	20	0	1531m	43m	9480	S	100.0	0.2	679:56.71	invaperco
5779	zhibing	20	0	1531m	44m	9492	S	100.0	0.2	679:21.84	invaperco
6212	nicusor	20	0	451m	377m	3356	R	100.0	1.6	668:47.67	cretin
28221	roca	20	0	3114m	88m	4188	R	99.7	0.4	8:26.15	seward.exe
16870	root	20	0	0	0	0	S	0.7	0.0	0:13.69	flush-8:0
1781	root	39	19	0	0	0	S	0.3	0.0	17:26.31	kipmi0
1903	root	20	0	0	0	0	S	0.3	0.0	1:24.46	kpanfs_dispatch
28483	dahlo	20	0	13384	1292	884	R	0.3	0.0	0:00.03	top
1	root	20	0	21416	652	448	S	0.0	0.0	0:01.70	init
2	root	20	0	0	0	0	S	0.0	0.0	0:00.03	kthreadd
3	root	RT	0	0	0	0	S	0.0	0.0	0:00.14	migration/0
4	root	20	0	0	0	0	S	0.0	0.0	0:01.40	ksoftirqd/0
5	root	RT	0	0	0	0	S	0.0	0.0	0:00.00	migration/0

## Instructions how to use programs

Easy to forget syntax

Manual pages

`man <program name>`

Ex.

`man ls`

(q to quit)

```

LS(1)                                User Commands                                LS(1)
NAME
  ls - list directory contents

SYNOPSIS
  ls [OPTION]... [FILE]...

DESCRIPTION
  List information about the FILES (the current directory by default).
  Sort entries alphabetically if none of -cftuvSUX nor --sort.

  Mandatory arguments to long options are mandatory for short options
  too.

  -a, --all
        do not ignore entries starting with .

  -A, --almost-all
        do not list implied . and ..

:[]

```

How do I log out?

```
exit
```

Exits only the current terminal

- Summary

- `cp` – copy a file
- `mv` – move a file
- `less` – view a file
- `nano` – view and edit a file
- `rm` – remove a file
- `head / tail`
- `wildcards`
- **tab completion – use it!!!**
- `top` – see active processes
- `man` – manual pages
- `exit` – Log out current terminal



[All](#)[Videos](#)[Images](#)[News](#)[Shopping](#)[More](#)[Settings](#)[Tools](#)

About 581 000 results (0,79 seconds)

However, **renaming multiple** or group of **files** quickly makes it very difficult task in a terminal. **Linux** comes with a very powerful built-in tool called **rename**. The **rename** command is used to **rename multiple** or group of **files**, **rename files** to lowercase, **rename files** to uppercase and overwrite **files** using perl expressions. Oct 10, 2013



[Rename – A Command Line Tool For Renaming Multiple Files in Linux](#)

<https://www.tecmint.com/rename-multiple-files-in-linux/>

[?](#) About this result [!](#) Feedback

[Howto: Linux Rename Multiple Files At a Shell Prompt – nixCraft](#)

<https://www.cyberciti.biz/tips/renaming-multiple-files-at-a-shell-prompt.html> ▼

Nov 26, 2005 - **Rename** command syntax. It is a faster way to group **rename files** in **Linux** or Unix-like system. Say hello to zmv for zsh. Say hello to mmv command. Examples: **Linux Rename Multiple Files** Using a Shell Script. POSIX shell **rename** all \*.bak to \*.txt. **Linux** Shell script to **rename files**. Perl Script To **Rename File**.

[linux - How to rename multiple files in single command or script in ...](#)

<https://unix.stackexchange.com/.../how-to-rename-multiple-files-in-single-command-...> ▼

## ssh - Secure SHell connection (ssh)

```
ssh -Y <username>@rackham.uppmax.uu.se
```

**Ex:**

```
ssh -Y dahlo@rackham.uppmax.uu.se
```

Terminal in Linux and OS X

PowerShell in Windows

# Laboratory time!

<https://uppsala.instructure.com/courses/69792/pages/linux-1-introduction-lab>